


# TECHNICAL DATA

## DIMENSION INFORMATION (MM)

Models	A	B	C	D	E
SF100	130	155	90	100	27
SF200	155	100	100	195	258
SF125	150	155	99	118	27
SF150	187	153	109	150	27

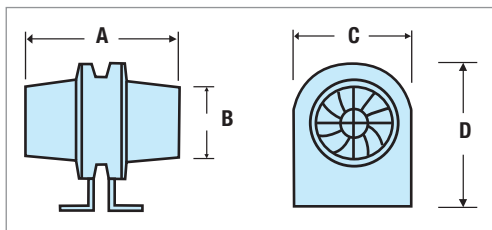


▶ Dimensions - SF150


## TECHNICAL SPECIFICATION

Models	SF100	SF200	SF125	SF150
Fan	ID100	CFD200	ID125	Hyper
Power	220 - 240V	220 - 240V	220 - 240V	220 - 240V
Fan Performance	23 l/s, 85m <sup>3</sup> /hr	31 l/s, 110m <sup>3</sup> /hr	36 l/s, 130m <sup>3</sup> /hr	89 l/s, 320m <sup>3</sup> /hr
Fan Wattage	20W	20W	20W	38W
Maximum Pressure	20 Pa	120 Pa	35 Pa	135 Pa
Fan Speed	2400 rpm	1400 rpm	2000rpm	2650 rpm
Sound Level	41 dB(A)	45 dB(A)	41 dB(A)	46 dB(A)
Max Operating Temp	50°C	50°C	50°C	70°C
IP Rating	IPX4	IPX4	IPX4	IPX2


▶ Dimensions - SF100/SF125/150

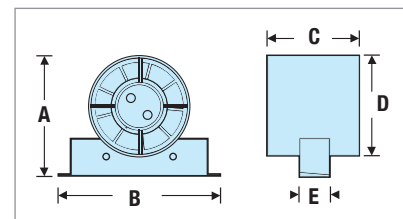


▶ Dimensions - SF200

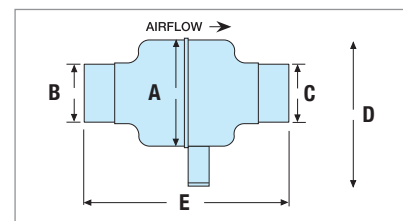


▶ Performance - SF100

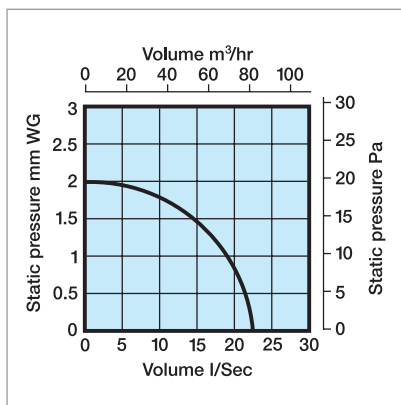


▶ Performance - SF125

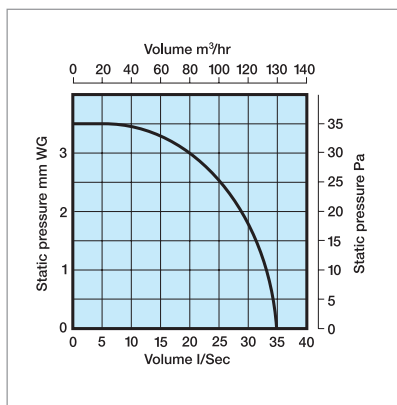

▶ Performance - SF200

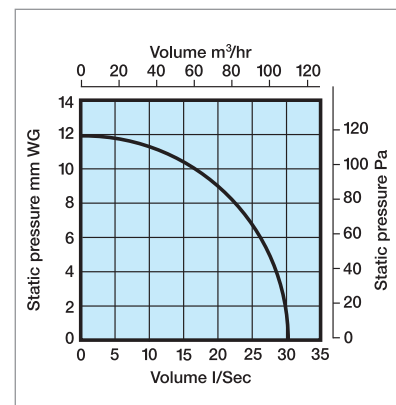

▶ Performance - SF150

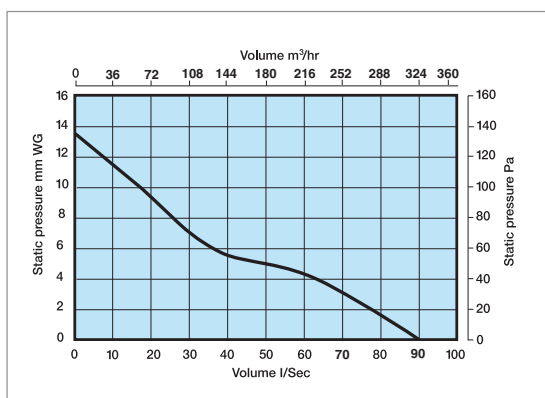

Note: PERFORMANCE - ID Fans maximum fan performance stated, this can vary depending on the length of ducting used.